



1. ALL DIMENSIONS ARE IN mm WITH  $\pm 0.20$  TOLERANCE UNLESS OTHERWISE SPECIFIED.  
 2. VIEWING ANGLE: 6:00 O'CLOCK.  
 3. VIEWING MODE: POSITIVE, REFLECTIVE  
 4. DISPLAY TYPE : TN  
 5. CONNECTION: PIN  
 6. FLUID SPECIFICATION:  
 DRIVING VOLTAGE: 4.2V  
 MULTIPLEX LEVEL: 1/3DUTY, 1/2BIAS  
 OPERATING TEMP. :  $-10^{\circ}\text{C}$  --  $+60^{\circ}\text{C}$   
 STORAGE TEMP. :  $-20^{\circ}\text{C}$  --  $+70^{\circ}\text{C}$

 <b>厦门精显电子有限公司</b> XIAMEN PRECISE DISPLAY CO., LTD.			
客户确认:	绘图: LTT	绘图编号: GYTN0499	单位: mm
	审核: 	客户编号:	日期: 2004.06.12
	批准: 	图纸版号: 01	页数: 1/3

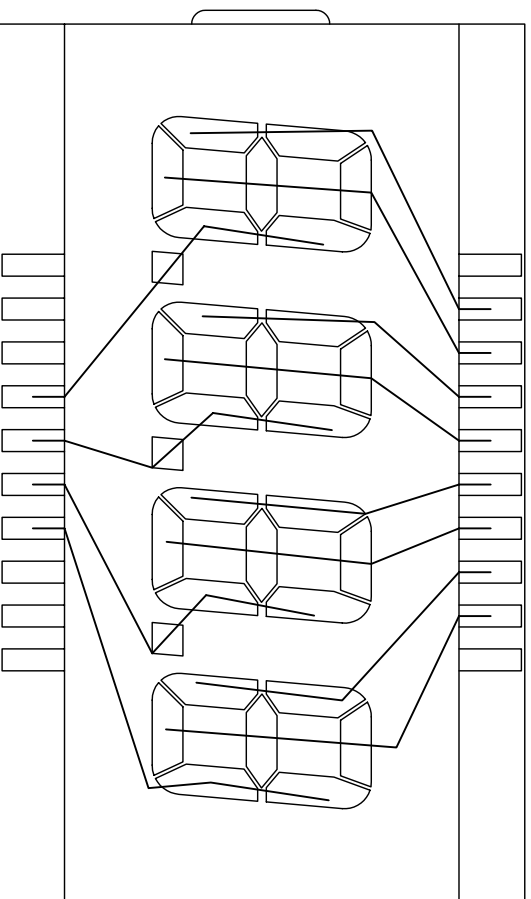

SEGMENT

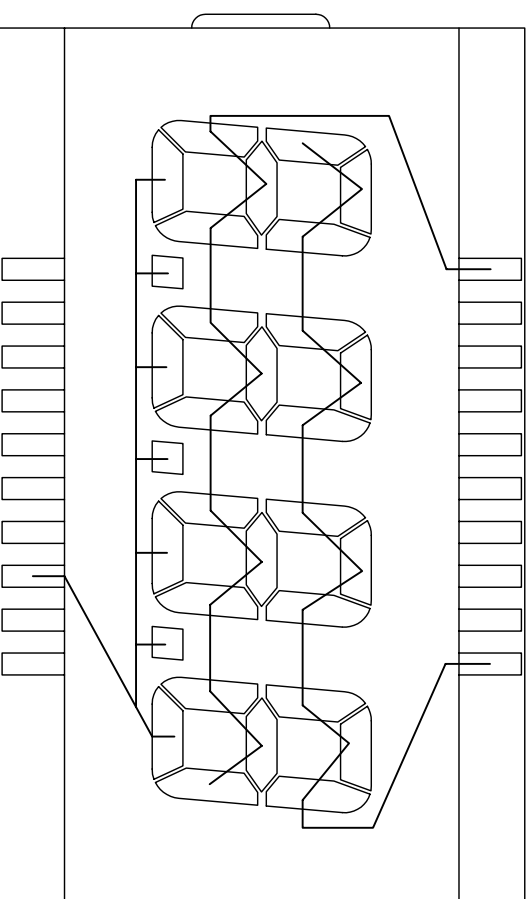

COMMON

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM1	--	--	--	4B	3B	2B	1B	--	--	--	COM1	1A	1F	2A	2F	3A	3F	4A	4F	--
COM2	--	--	--	4C	3C	2C	1C	--	--	--	--	1G	1E	2G	2E	3G	3E	4G	4E	COM2
COM3	--	--	--	4DP	3DP	2DP	--	COM3	--	--	--	1D	--	2D	--	3D	--	4D	--	--



厦门精显电子有限公司  
XIAMEN PRECISE DISPLAY CO., LTD.



客户确认:

绘图: LTT

绘图编号: GYTN0499

单位: mm

审核: 陈伟

客户编号:

日期: 2004.06.12

批准: 苏斌

图纸版号: 01

页数: 2/3