

1. ALL DIMENSIONS ARE IN mm WITH ± 0.20
TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. VIEWING ANGLE: 6:00 O'CLOCK.
3. VIEWING MODE: POSITIVE, REFLECTIVE
4. DISPLAY TYPE : TN
5. CONNECTION: PIN
6. FLUID SPECIFICATION:
- DRIVING VOLTAGE: 5.0V
- MULTIPLEX LEVEL: 1/3 DUTY, 1/2 BIAS
- OPERATING TEMP. : -30°C -- $+80^{\circ}\text{C}$
- STORAGE TEMP. : -40°C -- $+85^{\circ}\text{C}$

 厦门精显电子有限公司 XIAMEN PRECISE DISPLAY CO., LTD.			
客户确认:	绘图: <i>杨斌</i>	绘图编号: GYTN0107	单位: mm
	审核:	客户编号:	日期: 2004.2.8
	批准: <i>杨斌</i>	图纸版号: 01	页数: 1/2

PIN	1	2	3	4	5	6	7	8	9	10
COM1	\	6B	\	5B	\	4B	\	3B	\	2B
COM2	\	6C	\	5C	\	4C	\	3C	\	2C
COM3	\	6DP	\	5DP	\	4DP	\	3DP	\	2DP
PIN	11	12	13	14	15	16	17	18	19	20
COM1	\	1B	\	\	COM1	1A	1F	2A	2F	3A
COM2	\	1C	\	\	\	1G	1E	2G	2E	3G
COM3	\	\	\	COM3	\	1D	\	2D	\	3D
PIN	21	22	23	24	25	26	27	28		
COM1	3F	4A	4F	5A	5F	6A	6F	\		
COM2	3E	4G	4E	5G	5E	6G	6E	COM2		
COM3	\	4D	\	5D	\	6D	\	\		

1. ALL DIMENSIONS ARE IN mm WITH ± 0.20
TOLERANCE UNLESS OTHERWISE SPECIFIED.

2. VIEWING ANGLE: 6:00 O'CLOCK.

3. VIEWING MODE: POSITIVE, REFLECTIVE

4. DISPLAY TYPE : TN

5. CONNECTION: PIN



6. FLUID SPECIFICATION:

DRIVING VOLTAGE: 5.0V

MULTIPLEX LEVEL: 1/3DUTY, 1/2BIAS

OPERATING TEMP. : -30°C -- $+80^{\circ}\text{C}$

STORAGE TEMP. : -40°C -- $+85^{\circ}\text{C}$

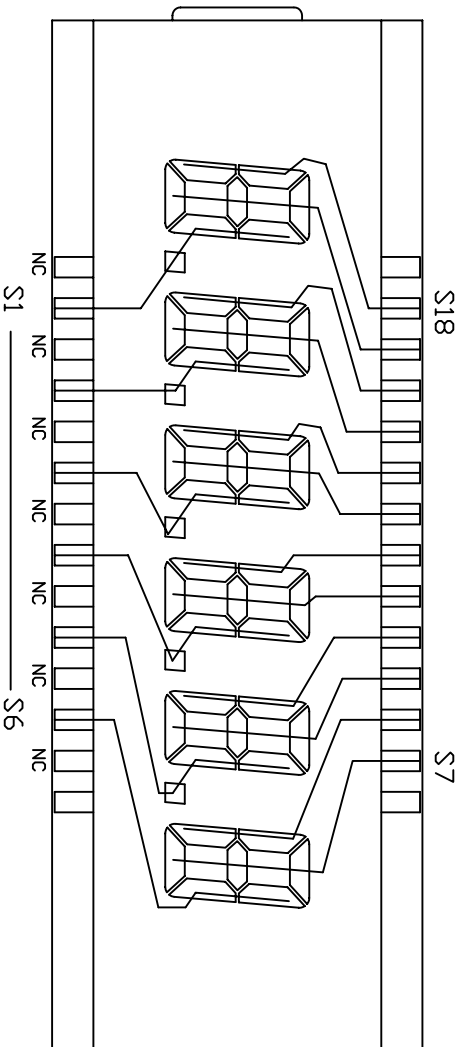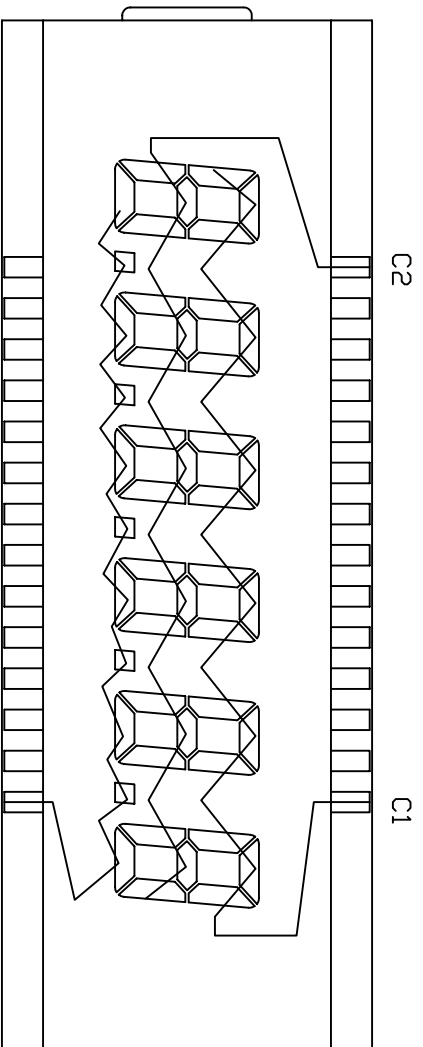

SEG

 厦门精显电子有限公司 XIAMEN PRECISE DISPLAY CO., LTD.		客户确认:		 单位: mm
		绘图: 苏斌 审核:	绘图编号: GYTN0107 客户编号:	
批准: 苏斌	图纸版本号: 01	页数: 2/2		