
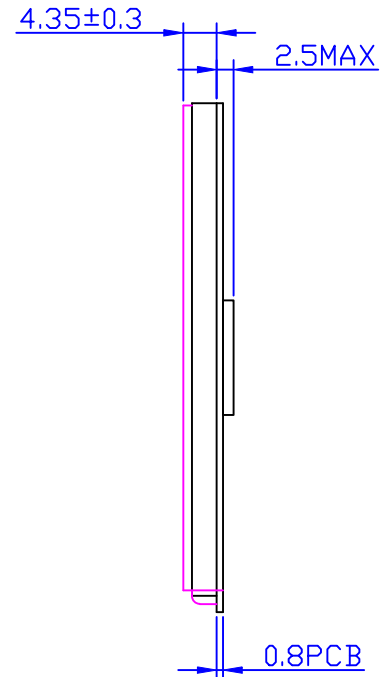


Specification:

- 1). VCC: 3.3V
- 2). Driver IC: COG (HX8238-D)
- 3). Controller IC: SSD1960
- 4). Luminance: 250cd/m²
- 5). Operating Temp: -20°C~70°C; Storage Temp: -30°C~80°C
- 6). All the raw material are RoHS compliant



1	GND
2	VDDIO
3	VDDD
4	VDDLCD
5	GND
6	TP-AUX
7	TP-TIRQ
8	TP-DIN
9	TP-CLK
10	TP-DOUT
11	TP-CS
12	GND
13	/CS
14	/RS
15	E</RD>
16	R/W</WR>
17	/RESET
18	GND
19~36	DB0~DB17
37	PWM
38	+5.0V
39	BL+
40	BL-

CIRCUIT DIAGRAM

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2

厦门精显电子有限公司 XIAMEN PRECISE DISPLAY CO., LTD.			
确认:	绘图: ZM	绘图编号: LCM320240A	单位: mm
	审核: CHEN	客户编号: PGM320240-TFT	日期: 2010.03.14
	批准:	图纸版号: V1.0	页数: 1/1