



**PIN DEFINITION**

NO.	SYMBOL
1	CSB
2	RSTB
3	A0
4	SCLK (D6)
5	SDA (D7)
6	VDD
7	VSS
8	V0
9	XV0
10	VG



SEG0 — SEG131

**LCD LAYOUT**

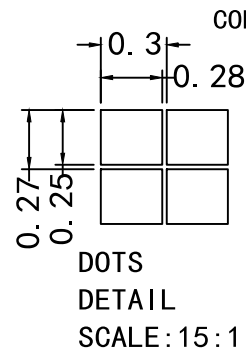

DISPLAY TYPE:FSTN,Reflective,Positive  
VIEWING DIRECTION: 12:00 O'CLOCK  
DRIVER IC:ST7567  
LOGIC VOLTAGE:3.3±0.2V  
LCD DRIVE VOLTAGE(V<sub>lcd</sub>):7.5V  
DRIVING METHOD:1/49 DUTY,1/6 BIAS  
OPERATING TEMP.:−20°C TO 70°C  
STORAGE TEMP.:−30°C To 80°C  
INTERFACE CONNECTOR: FPC

		<b>厦门精显电子有限公司</b> <b>XIAMEN PRECISE DISPLAY CO., LTD.</b>		
		客户确认:	绘图: <i>ZH</i>	
	审核:	客户编号: PGG13248A-RN-FBW-01	日期:2012.04.12	
	批准:	图纸版号: 01	页数:1/1	