


* NOTES:

- 1.LED TYPE: 3 DIES
- 2.COLOUR: GREEN
- 3.DOMINANT WAVELENGTH:520~525nm
- 4.SUPPLY VOLTAGE: 3.1~3.4 V
- 5.CURRENT: 20mA-30mA
- 6.LUMINOUS INTENSITY: TBD cd/m^2 (MIN)
- 7.OPERATION TEMP: -40°C TO 75°C
- 8.STORAGE TEMP: -40°C TO 80°C
- 9.UNIFORMLY: 75%(MIN)
- 10.UNMARKED TOLERANCES: $\pm 0.2\text{mm}$

- ALF(ALUMINIUM FOIL)
- D.S.T(DOUBLE SIDE TAPE)
- E.L.A(Effective Light Area)

* CIRCUIT DIAGRAM (LED 3 Dies)

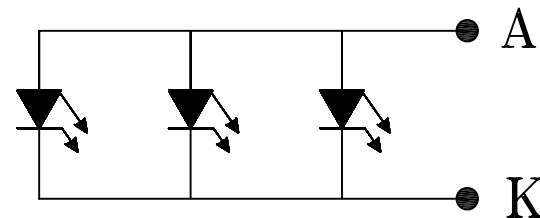

客户确认:		厦门精显电子有限公司 XIAMEN PRECISE DISPLAY CO., LTD.		单位: mm
		绘图: Chen	绘图编号: ZPSG98303A0-P	
		审核:	客户编号: ZI144A (GREEN)	日期: 2010.4.6
		批准: LuoWei	图纸版号: Ver 1.0	页数: 1/1